




Office: B-20, Parmanu Nagar, Sector -IV,
Vashi, Navi Mumbai - 400 703. Works: MIDC, Turbhe
Tel.:(022) 2782 1641/48 • Fax : (022) 27821124
Web : www.ssfilters.com • email: info@ssfilters.com

SS FILTERS PVT. LTD.

AN ISO 9001:2008 COMPANY

Specification Sheet

POLYETHERSULFONE MEMBRANE PLEATED FILTER CARTRIDGE

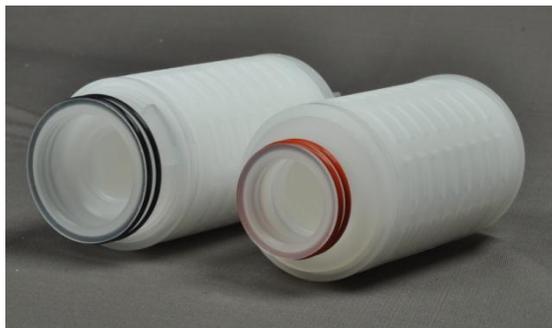

Polyethersulfone (PES) absolute rated membrane cartridges are inherently hydrophilic and contain no added surfactants or wetting agents that could alter the taste in beer, wine, bottle water & other beverages. PES absolute filters are sterile filters offering superior flow characteristics, high contaminant holding capacity and consistent removal of particles and micro organisms. The cartridges are 100% integrity tested to assure reliability.

Applications of PES membrane filters include buffer filtration, formulations and filling, media filtration & product filtration. Most buffer filtrations in a biotechnological process are used to control the level of bioburden in the overall process. Sterilising grade PES filters are especially designed to fulfill the needs of the bioburden process without losing process safety. Media and product filtration includes sterile filtration of media in a fermentation process. PES cartridges are especially designed to prevent infections in costly fermentation processes. In biopharmaceutical processes, PES membranes are recommended to be used in stages before storage tanks or in late stage processes.

FEATURES & BENEFITS:

- Provide broad chemical compatibility.
- Extremely high flow rates at low pressure drops
- PES is permanently hydrophilic membrane
- Cost effective for a variety of aqueous based liquids.
- No adhesives, binders or surfactants.
- Reduces downtime & improves throughput.
- Meets ASTM bacterial validation standards

PRODUCT SPECIFICATIONS

Micron Rating	0.2 ,0.45, 0.65 μ
Length	5", 10" , 20" , 30" , 40"
Inner Dia	Approx. 28 mm
Outer Dia	Approx. 65-69 mm
Effective surface area per 10" element	7.5 sq. feet (0.65 msq.)
Max operating temperature	80°C
Sterilization	
Autoclave	121°C, 30 min, 10 times
Hot water	80°C, 30 min, 30 times
Max differential pressure	5.5 bar (80 psi)@ 21°C
Min. bubble point	
0.45 Microns	\geq 24 psi (1.65 bar)
0.65 Microns	\geq 17 psi (1.17 bar)

CONSTRUCTION:

- Filter media: 100% PES hydrophilic membrane
- Support media: Polypropylene fiber
- MOC: Polypropylene
- 'O' Ring/ Gaskets: Silicone/ EPDM/ Viton

CONFIGURATION:

- Double open end type (DOE Type)
- Code 7S (226 'O' Ring design/ Bayonet or fin)
- Code 3S (222 'O' Ring design/ Bayonet or fin)

APPLICATIONS:

End point filtration in variety of processes like

Bottle and process water
Beer, wine & beverages
Serum & blood based products
Cell & tissue culture media
Diagnostics
Microbiological growth media
Antibiotics
Vaccine preparation
Ophthalmics
Oral & topical applications
Protein solutions
Inks, dyes & lacquers
Acid, base & solvent filtration

